

# Allowable bending radius!! (Insulated Wire)



6D

Great improvement!

2D

※1,2,3,4


**Compatible models.**

- RFX-MTW**
- UE/SSX (series)**

- ※1: Only when used at an ambient temperature of 95°C (203°F) or less.
- ※2: Fixed wiring only.
- ※3: D=Outer Diameter.(φ)
- ※4: When using 2D, multiply by the following reduction factor depending on usage conditions.

Ambient Temperature (°C)	30	40	50	60	70	80	90
Adjustment Factors	0.96	0.88	0.79	0.7	0.59	0.46	0.26

6D

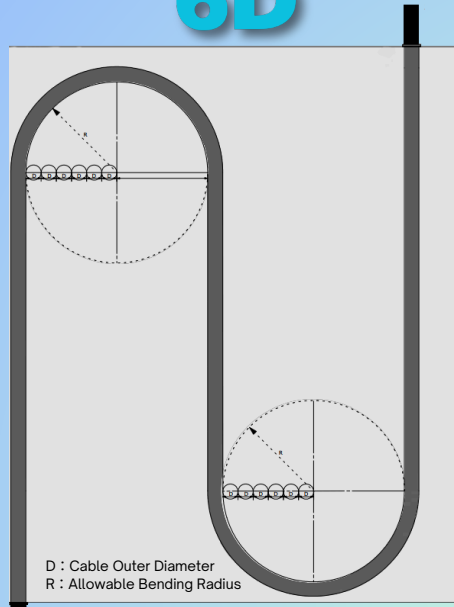


551 mm ※

**Save wiring space!**  
**Reduce. ≒ 60%**

**Shorten the cable**  
**Reduce. ≒ 33%**



2D

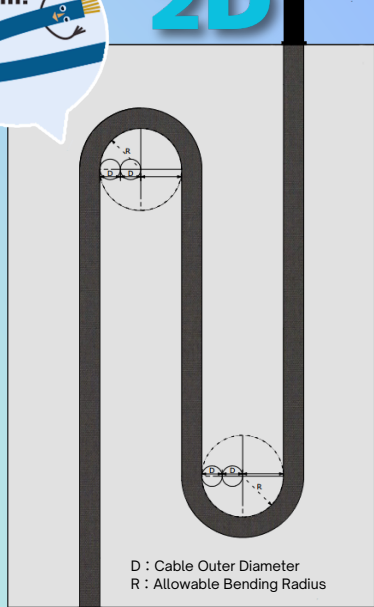

224 mm ※

Sample of ※4/0AWG(107SQ)

- Please feel free to contact us!  
- Information about compatible cables can be found here!

