

FAFXQ-5E22SLAB/CM (BU)

QUAD CAT5e Ethernet flexible cable

(Cannot be used for 1000BASE-T because of the 2-pair specification)

- Heat resistance ★★★★★
 - Oil resistance ★★★★★
 - Noise resistance ★★★★★
 - Flame resistance ★★★★★
 - Flame non-migratory ★★★★★
 - Transport property ★
- ※The characteristic is an aim.



Certification	UL CM	cUL CM	UL AWM	cUL AWM
Applicable standard	UL 444	CSA C22.2 No.214	UL 758	CSA C22.2 No.210
Official symbol	CM	CM	UL STYLE 20276	CSA AWM II A/B
Voltage rating	300V	300V	30V	30V
Temperature rating	75°C	75°C	80°C	80°C
Conductor	UL 444	CSA C22.2 No.214	UL 758	CSA C22.2 No.210
Flame rating	Vertical-Tray Flame Test	Vertical-Tray Flame Test	VW-1	FT1

> Application

- Appropriate for wiring in excellent flexibility.
- CAT5e
- QUAD(2P)
- Flexible cable with UL, cUL at 300V 75°C. (Category : DUZX, DUZX7, AVLV2, AVLV8)
- Mechatrolink-III, Mechatrolink-IV, EtherCAT

> Features

- It passes Vertical-tray Flame Test of UL, cUL.
- Flame resisting : UL VW-1, cUL FT1.
- Oil, heat, flame resisting flexible PVC material is used for sheath.
- CM listing standard is acquired and it corresponds to NFPA70.
- Double shielded


> Construction table

No. of quads	Conductor		Polyethylene insulation		Oil,heat-resistant flexible-PVC sheath		Approx. weight (lbs/1000ft) (kg/km)	Electrical Characteristics		
	Size (AWG)	Construction (Line/mm)	Outside diameter (inch)	Outside diameter (mm)	Overall diameter approx. (inch)	Overall diameter approx. (mm)		Conductor resistance (Ω/km20°C)	Insulation resistance (MΩkm20°C)	Electrical strength (V/1 min.)
1	22	7/0.26 (7/10.2mil)	0.054	1.38	0.252	6.4	38(57)	less than 55.5	more than 5,000	AC700

> Electric characteristics (High Frequency)

Electric Characteristics	Frequency (MHz)				
	1	4	16	31.25	100
Insertion Loss (dB/100m)	less than 2.0	less than 4.1	less than 8.2	less than 11.7	less than 22.0
NEXT loss (dB)	more than 65.3	more than 56.3	more than 47.2	more than 42.9	more than 35.3
Characteristic Impedance (Ω)	85-115				

> Construction figure

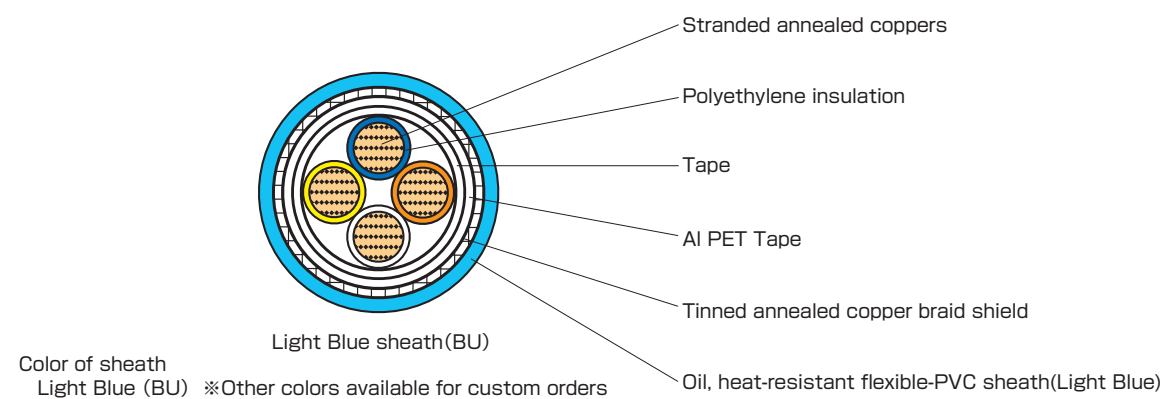

> Standard sales length

200m

> Surface marking

TAIYO/TSUNET FAFXQ-5E22SLAB/CM E176892-TK C(UL)US CM 22AWG 75°C or AWM 20276 VW-1 or AWM II A/B 80°C 30V FT1 LF R15 length mark

※R15 indicates "Compliant with RoHS Directive 2011/65/EU and Directive (EU) 2015/863 (10 substances)".

> Identification

Pair number	1	2
No.1 kind line	Blue	Orange
No.2 kind line	White	Yellow